

PENSTOCK SPECIFICATION SHEET

SITE:

REF:

QTY:



EXPRESS VALVE SERVICES LIMITED


UNITS 18/19 THE WALLOW'S INDUSTRIAL ESTATE - DUDLEY ROAD - BRERLEY HILL - WEST MIDLANDS - DY5 1HR

Tel: 01384 263872
 Fax: 01384 480148
 e-mail: sales@expressvalves.co.uk
 Web: www.express-valves.co.uk

Due to our continuous product development policy we reserve the right to modify designs or dimensions

INFORMATION REQUIRED


DIAMETER OF PIPE A =
 INVERT TO COVER LEVEL L =
 FLUSH OR REBATE INVERT =

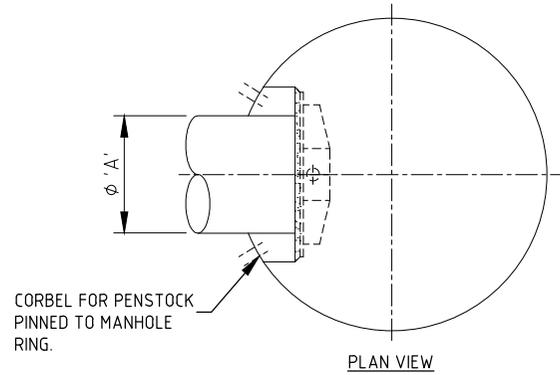


CORBEL FOR PENSTOCK
 PINNED TO MANHOLE
 RING.

PLAN VIEW

CAP WITH SURFACE BOX & TEE KEY

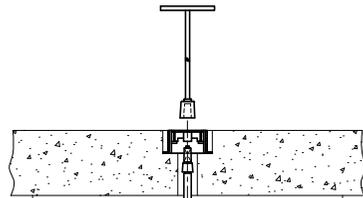


CIRCULAR APERTURE
 PENSTOCK WITH REBATE
 INVERT.

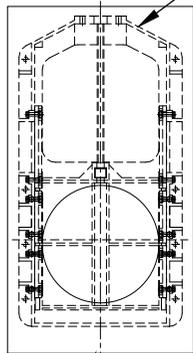


CONCRETE PLINTH REQUIRED
 FOR PENSTOCK IN CIRCULAR
 CHAMBER.

FRONT ELEVATION

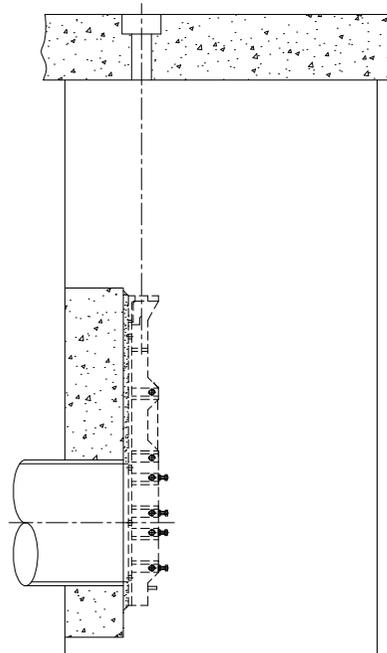

☐ REBATE INVERT

SIDE ELEVATION

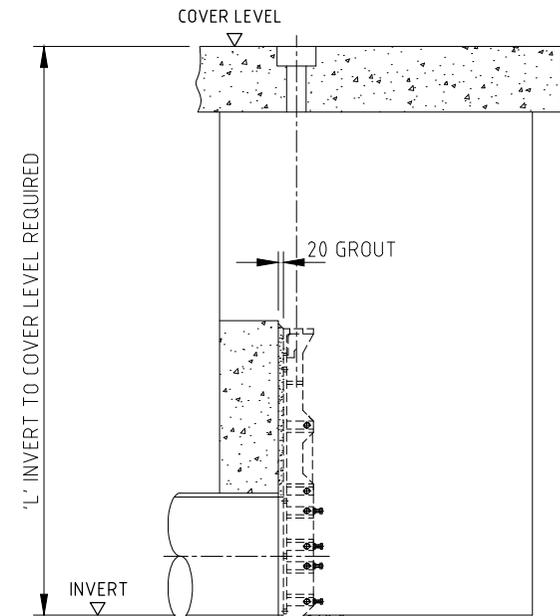

☐ FLUSH INVERT

SIDE ELEVATION

EXPRESS VALVE SERVICES LIMITED
 UNITS 18/19
 THE WALLOW'S INDUSTRIAL ESTATE
 DUDLEY ROAD
 BRERLEY HILL
 WEST MIDLANDS
 DY5 1HR
 Telephone: 01384 263872 e-mail: sales@expressvalves.co.uk
 Facsimile: 01384 480148 www.express-valves.co.uk